


ASTON

PRIMED 3 PANEL

– INTERNAL DOOR

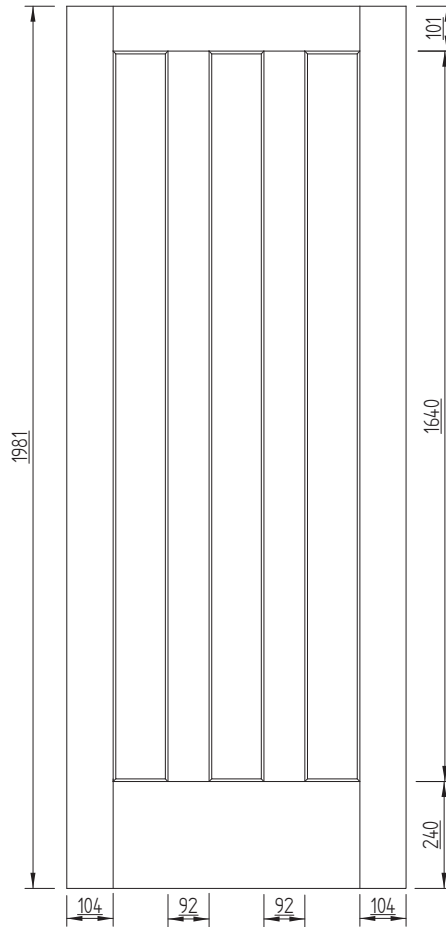

SPECIFICATIONS

Veneer Species:

MDF double coat primed

Veneer Thickness:

2.5mm

Edge Lippings:

8mm paint grade timber

Top & Bottom Lippings:

8mm paint grade timber

Panel Thickness:

12mm Particle board or MDF

Moulding Size & Profile:

10mm Ovolo

Stile & Rail Core:

Particle board

Construction:

Tongue & groove joint with dowel and glue

Glazing:

N/A

Packaging:

Shrinkwrap with plastic edge corner protectors.


A4 paper fitting instruction



5 year guarantee
against manufacturing
defects

ASTON

PRIMED 3 LIGHT CLEAR GLAZED – INTERNAL DOOR

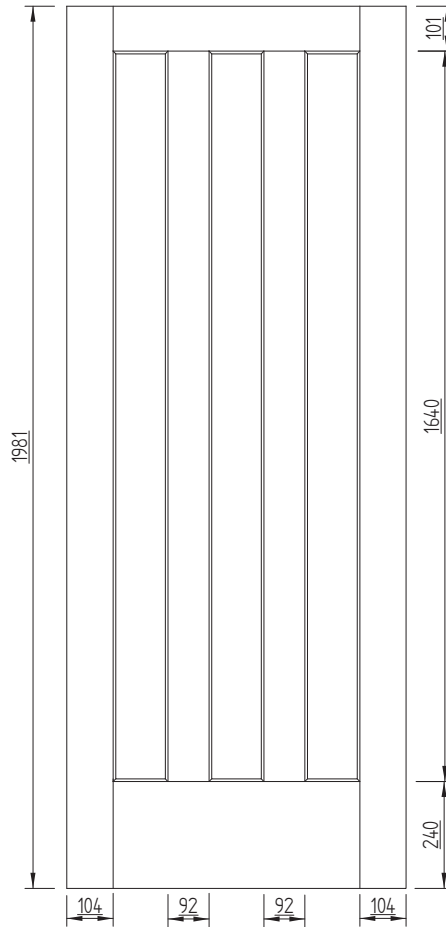

SPECIFICATIONS

Veneer Species:

MDF double coat primed

Veneer Thickness:

2.5mm

Edge Lippings:

8mm paint grade timber

Top & Bottom Lippings:

8mm paint grade timber

Panel Thickness:

N/A

Moulding Size & Profile:

10mm Ovolo

Stile & Rail Core:

Particle board

Construction:

Tongue & groove joint with dowel and glue

Glazing:

4mm clear toughened

Packaging:

Shrinkwrap with plastic edge corner protectors.

A4 paper fitting instruction



5 year guarantee
against manufacturing
defects